


RoHS

REV.	DESCRIPTION	DATE	DWG.	CHKD
0	PROPOSED	13/08/07	B.K	T.H

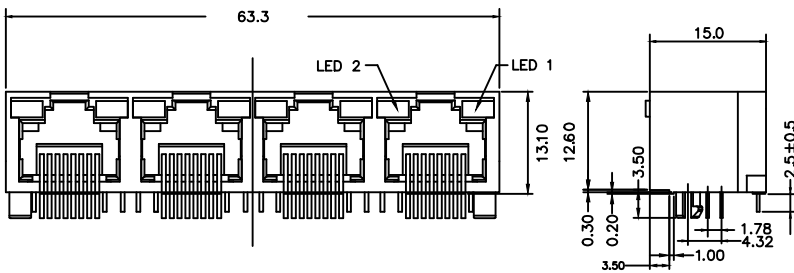

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Part No.


M610-88X2-40X21

Gold Plating

- 1 - 3u"
- 2 - 6u"
- 3 - 15u"
- 4 - 30u"
- 5 - 50u"

LED Color Options Table

LED Color Options		LED DASH OPTION
Position 2(Left)	Position 1(Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
Green	Red	A
Red	Green	B

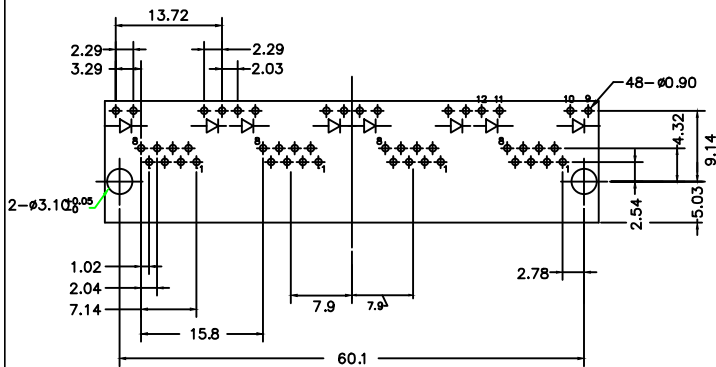

PCB LAYOUT/TOP VIEW

FINISH		NAME		PART NO.	
MATERIAL: *****	NET WEIGHT:	COLOR:	GENERAL TOLERANCE: ±0.2 ±3°	UNIT: mm	REV. O
FIN. & TREAT: *****	GROSS WEIGHT:	SCALE:	SIZE: A3		REV. *
CUSTOMER: *****	PART NO.: M610-88X2-40X21				
CUSTOMER PART NO.: *****	PROPOSAL NO.: M610-88X2-40X21				
美星鴻科技股份有限公司 MSH TECHNOLOGY INC.		NAME: RJ45 Side Entry Gang Jack W/LED			
APP: 13/08/07 DWS: 13/08/07		SHEET 1 OF 1			
T.HASHIMOTO T.HASHIMOTO B.KA					