
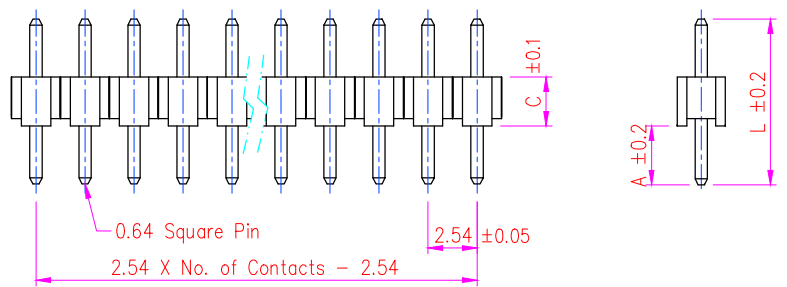


REV.	DESCRIPTION	DATE	DWG.	CHKD
0	PROPOSED	'14.06.10	B.K	T.H

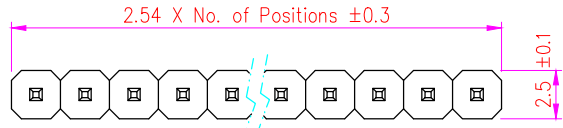

Specifications
 Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard :
 Contact Plated : Full Gold, Full Tin, Selective Plated

Order Information

MPA1 1 - 1 1 XX - X XX X

Serial Type
 Terminal Type
 1 : Straight Type
 Material
 0 : P.B.T
 1 : PA6T
 Row Type
 1 : Single Row

No. of Pin per Row

Terminal Dim.


1. A=3.05 ,L=11.60 ,C=2.54
 2. A=3.00 ,L=14.00 ,C=2.54
 3. A=7.00 ,L=16.54 ,C=2.54
 4. A=6.00 ,L=34.54 ,C=2.54
 5. A=2.60 ,L=12.20 ,C=2.54
 6. A=12.5 ,L=18.00 ,C=2.54
 7. A=2.0 ,L=8.00 ,C=2.54
 8. A=3.00 ,L=13.00 ,C=2.54
 9. A=3.00 ,L=13.50 ,C=2.54
 A. A=2.00 ,L=7.20 ,C=2.00
 B. A=3.20 ,L=7.20 ,C=2.00
 C. A=3.00 ,L=8.54 ,C=2.54
 D. A=3.00 ,L=11.50 ,C=2.50
 F. A=5.00 ,L=12.50 ,C=2.54
 G. A=11.00 ,L=25.00 ,C=2.54
 H. A=3.00 ,L=21.00 ,C=2.54
 I. A=2.90 ,L=15.6 ,C=2.54

Packing List
 0 : In Bag
 A : In Tube
 B : W/Cap In Tube
 C : W/Film In Tube
 D : W/Cap In Tape & Reel
 E : W/Film In Tape & Reel

Contact Plating

Contact Plating Type		
Full Gold Plating	Duplex Plating Gold Plated On Contact Area Tin Plated On Solder Area	Full Tin Plating
GF : Gold Flash G1 : Gold 3u" G2 : Gold 5u" G3 : Gold 10u" G4 : Gold 15u" G5 : Gold 30u"	HF : Gold Flash, Tin 100u" H1 : Gold 3u", Tin 100u" H2 : Gold 5u", Tin 100u" H3 : Gold 10u", Tin 100u" H4 : Gold 15u", Tin 100u"	T1 : Tin 100u"

Recommended
P.C. Board
Hole Layout



NOTE	FINISH	PART NO.	N A M E	NO.
MATERIAL *****	NET WEIGHT *****g	COLOR *****	GENERAL TOLERANCE ±0.2 ±3°	UNIT:mm
FIN. & TREAT *****	GROSS WEIGHT *****g	SCALE 1:1	SIZE A4	
CUSTOMER *****	PART NO. MPA11-11XX-XXX0	REV. 0	A	
CUSTOMER PART NO. *****	PROPOSAL NO. *****-****-**-**	REV. *		
MSH TECHNOLOGY		NAME: Pin Header P2.54mm (SHEET 1 OF 5)		
APP: '14.06.10 CHKD: '14.06.10 DWG: '14.06.10 T.HASHIMOTO T.HASHIMOTO B.KA		Single Row, Straight Type		
