

6

5

4





3

2


1

REV.	DESCRIPTION	DATE	DWG.	CHKD
0	PROPOSED	14.06.10	B.K	T.H

### 禁止使用一级环境管理物质

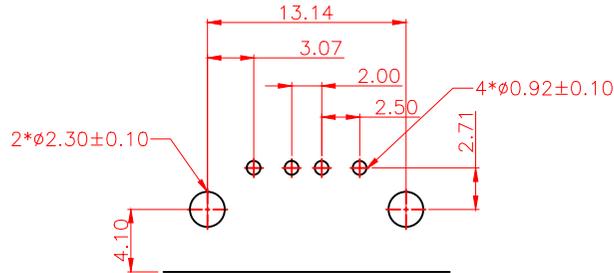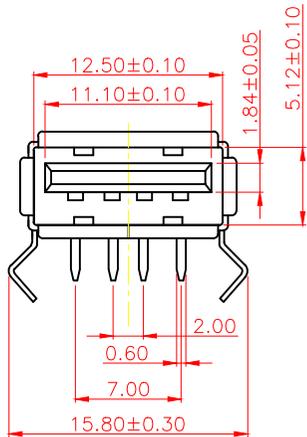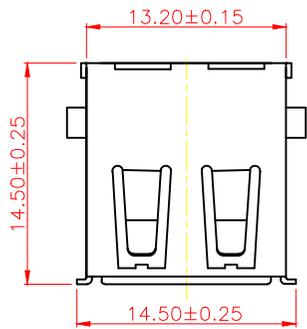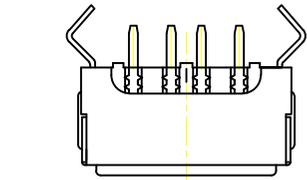

P.C.B LAYOUT  
TOLERANCE: ±0.05

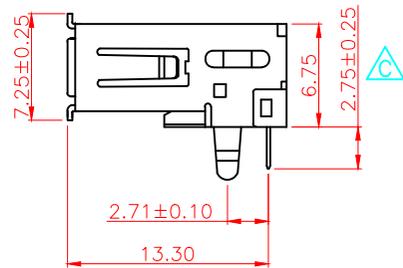

### ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.0 Amperes.  
 Dielectric Withstanding Voltage: AC 500 V r.m.s.  
 Insulation Resistance: 1000 Megohms Minimum at DC 500V.  
 Contact Resistance: 30 Milliohms Maximum.  
 Operating Temperature: -55°C~85°C.

### MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 35N Maximum  
 Contact Separation Force: 10N Minimum

### MATERIALS:

Contacts: Brass.  
 Insulator: PBT, UL 94V-0 Rated.  
 Shell: Brass.

## MU3-X-A4FX-XXRX-25

5-Unleaded  
 Manufacturing Process(ROHS)  
 Q-Unleaded Manufacturing Process  
 (SONY SS-00259 STANDARD)  
 F-FEPI12001A

1-Gold Flash  
 3-Selective Gold 5u"  
 5-Selective Gold 15u"  
 7-Selective Gold 30u"

2-PVC盒  
 3-PE袋  
 1-Front:Nickel And Back:Tin  
 2-Front:Tin And Back:Nickel  
 N-Nickelage  
 T-Tinling  
 K-Black  
 W-White  
 B-Blue  
 C-Pantone 322C  
 D-Pantone 661C  
 D P-285C藍

NOTE	FINISH	PART NO.	N A M E	NO.
MATERIAL: *****	NET WEIGHT: *****	COLOR: *****	GENERAL TOLERANCE: ±0.2 ±3°	UNIT: mm
PIN & WIRE: *****	PROCESS: *****	SCALE: 1:1	SIZE: A4	
CUSTOMER: *****	PART NO.: *****	MU3-X-A4FX-XXRX-25		REV. O
CUSTOMER PART NO.: *****	PROPOSAL NO.: *****	*****-***-**-**		REV. *
<b>MSH TECHNOLOGY</b>		NAME: (SHEET 1 OF 5) USB A TYPE FEMALE RIGHT ANGLE TYPE		
APP: '14.06.10	CHKD: '14.06.10	DRG: '14.06.10	T.HASHIMOTO   T.HASHIMOTO   B.KA	

(CUSTOMER DRAWING)

\*\*\*\*\*