



Type	DIM B	Unit:mm
1:Short Pin	2.80mm	
3:Short Pin	2.55mm	
5:Long Pin	3.18mm	

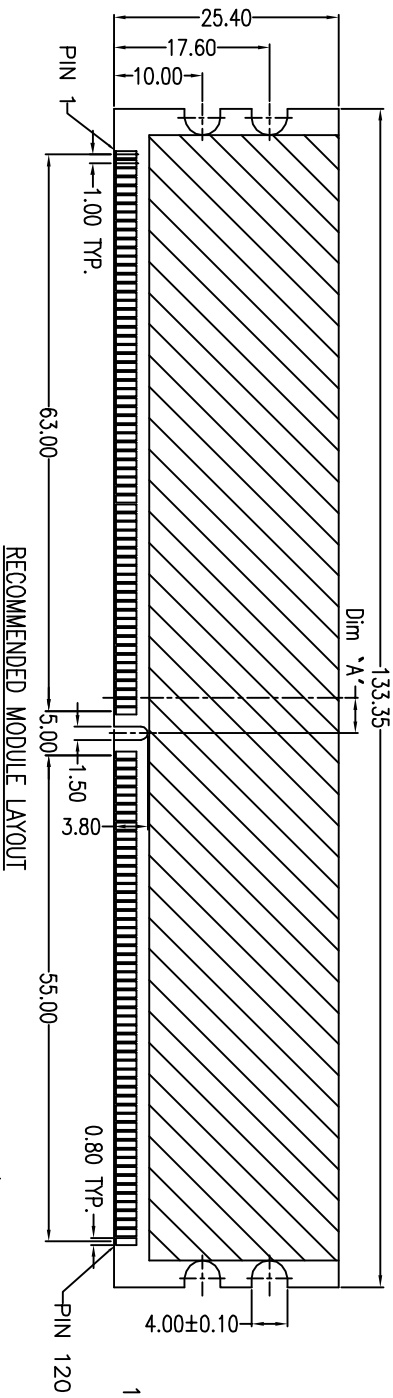

Body: Nylon66, Glass Filled UL 94-0 Rated Color: Black
 Ejector: Nylon66, Glass Filled UL 94V-0 Rated. Color: Ivory
 Contact: Brass & Phosphor Bronze
 Contact Plating: Gold Plating Over Nickel On Contact Area
 Tin Plating On Solder Tail:
 Retention Force-Terminal: 300 Grams Min. Per
 Insertion Force: 35 lb. Max.
 Umating Force: 14 Grams Min. Per Pin Pair
 Contact Resistance: 30 Milliohms Max. Initial
 Insulation Resistance: 1000 Megohms Min. AT 500 VDC
 Withstand Voltage: 500 V AC,
 Operating Temperature: -55°C TO +105°C

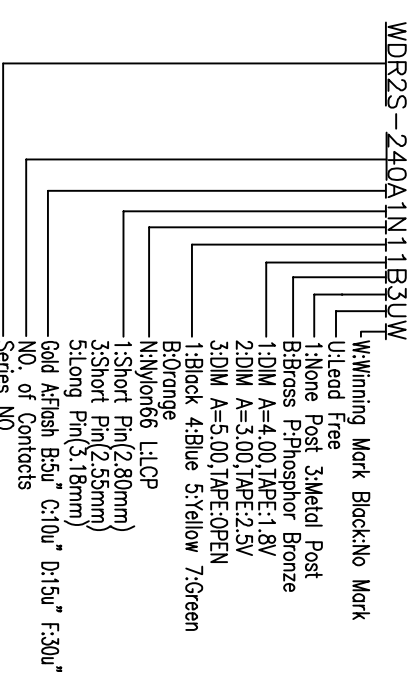

NOTE	FINISH	PART NO.	NAME	NO.
MATERIAL *****	NET WEIGHT *****g	COLOR *****	GENERAL TOLERANCE	UNIT:mm
FIN. TREAT *****	GROSS WEIGHT *****g	SCALE 2.5:1	SIZE A4	REV. 0
CUSTOMER *****	PART NO. MWD2S-240A1N1B3UW	PROPOSAL NO. *****-*****-*****	REV. *	
CUSTOMER PART NO. *****				
MSH TECHNOLOGY				
APP. '14.06.10	CHD '14.06.10	DMC '14.06.10	NAME	
T.HASHIMOTO	T.HASHIMOTO	B.KA	DDR 240 PIN CONNECTOR	
WITH LEAD				
(CUSTOMER DRAWING)				

GENERAL TOLERANCE	ANGLE
.XXX	!
.XX	! 0.15
.X	! 0.25